



无动力输送辊筒(塑座) Non-Powered Conveyor Roller (Plastic Seat)

1400系列 1400 Series

产品特点

- 1.作为无动力辊筒家族中的典型产品，它的应用范围十分广泛，尤其是在箱式输送中，如机场行李分拣、物流配送中心等。
- 2.精密滚珠轴承和塑胶轴承座、端盖的设计组成了关键的轴承组件部分，它不仅美观，更重要的是辊筒运行的更安静。
- 3.辊筒末端的端盖，有效地防止了工作环境中灰尘和溅水的进入。
- 4.塑胶轴承座的设计，使得它具备某些特殊环境下工作的能力。
- 5.轴承的润滑方式可根据需要灵活配置油润滑或脂润滑。
- 6.适合高速输送，根据辊筒直径和长度不同，速度会有差异。

Non-Powered Conveyor Roller 1400
Product Features

- 1.As a typical product in the family of non-powered roller, it has a wide range of applications, especially in box conveyor, such as airport baggage sorting, logistics and distribution centers.
2. The design of precision ball bearings and plastic bearing housings and end caps make up the key bearing assembly part, which is not only beautiful, but more importantly, the roller runs more quietly.
3. The end cover on the underside of the roller effectively prevents the entry of dust and splashing water in the working environment.
4. The design of plastic bearing housing makes it has the ability to work under some special environment.
5. The lubrication method of the bearing can be flexibly configured with oil lubrication or grease lubrication according to the needs.
6. Suitable for high speed conveying, the speed will be different according to the roller diameter and length.

1400系列 (弹性轴) 1400 Series (Flexible Shaft)




1400系列(弹性轴)				
管径系列	轴直径			
38	12			
50	S11/12/15			
60	S11/12/15			
管材(表面处理)	管径与壁厚	轴直径		
		S11	12	15
钢制, 镀锌(抛光镀锌)	38x1.2		3812-12-T	
	50x1.5	5015-S11-T	5015-12-T	5015-15-T
	50x2.0	5020-S11-T	5020-12-T	5020-15-T
	60x2.0	6020-S11-T	6020-12-T	6020-15-T
钢管, 镀锌(套PVC软胶)	50x1.5	5015-S11-T	5015-12-T	5015-15-T
	50x2.0	5020-S11-T	5020-12-T	5020-15-T
不锈钢(304)	38x1.2		3812-12-T	
	50x1.5	5015-S11-T	5015-12-T	5015-15-T
	60x2.0	6020-S11-T	6020-12-T	6020-15-T

1400系列 (内螺纹) 1400 series (female thread)



1400系列(内螺纹)				
管径系列	轴直径			
38	12			
50	12/15			
60	12/15			
76	20			
管材(表面处理)	管径与壁厚	轴直径		
		12(M8x15)	15(M10x20)	20(M12x25)
钢制, 镀锌(抛光镀锌)	38x1.2	3812-12-M		
	50x1.5	5015-12-M	5015-15-M	
	50x2.0	5020-12-M	5020-15-M	
	60x2.0	6020-12-M	6020-15-M	
钢管, 镀锌(套PVC软胶)	76x3.0			7630-20-M
	50x1.5	5015-12-M	5015-15-M	
不锈钢(304)	50x2.0	5020-12-M	5020-15-M	
	38x1.2	3812-12-M		
	50x1.5	5015-12-M	5015-15-M	
	60x2.0	6020-12-M	6020-15-M	
	76x3.0			7630-20-M

1400系列 (铣扁) 1400 series (milled flat)

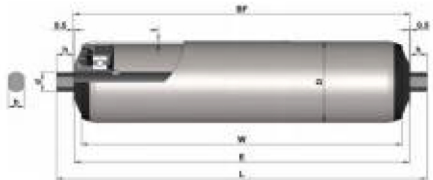

1400系列(铣扁)				
管径系列	轴直径			
38	12			
50	12/15			
60	12/15			
76	20			
管材(表面处理)	管径与壁厚	轴直径		
		12	15	20
钢制, 镀锌(抛光镀锌)	38x1.2	3812-12-B		
	50x1.5	5015-12-B	5015-15-B	
	50x2.0	5020-12-B	5020-15-B	
	60x2.0	6020-12-B	6020-15-B	
钢管, 镀锌(套PVC软胶)	76x3.0			7630-20-B
	50x1.5	5015-12-B	5015-15-B	
不锈钢(304)	50x2.0	5020-12-B	5020-15-B	
	38x1.2	3812-12-B		
	50x1.5	5015-12-B	5015-15-B	
	60x2.0	6020-12-B	6020-15-B	
	76x3.0			7630-20-B